


# TWIN DRUi

Fully digitized dual axes signal- and power electronics

- 180 – 600 Amp at 28 VDC for each axis available
- 100 Amp at 270 VDC for each axis available
- highly flexible I/O-structure
- EMI filter integrated
- MIL-STD 810 ground mobile fulfilled
- MIL-STD 461 ground army fulfilled

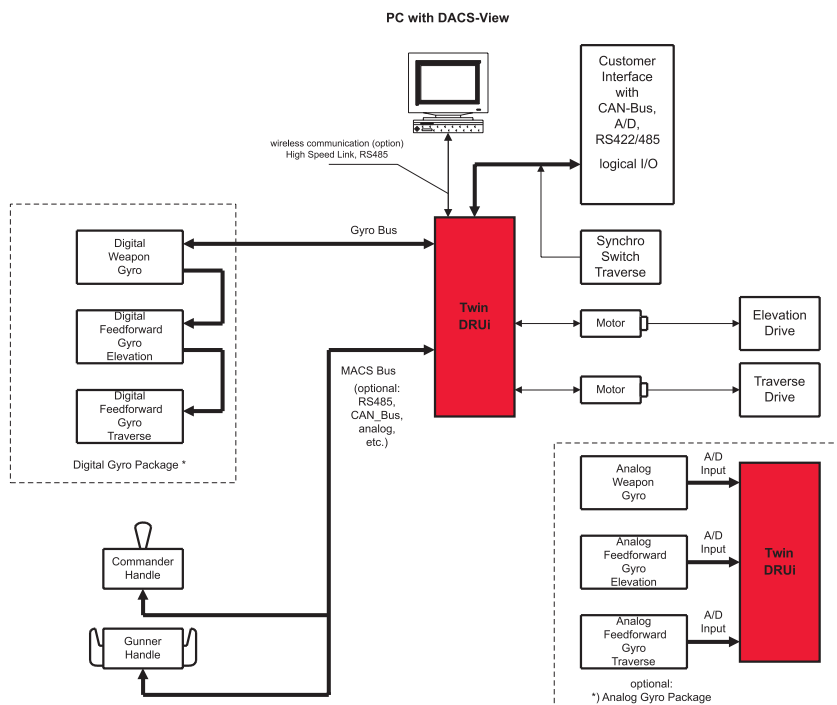

Innovation In Motion.

**CURTISS  
WRIGHT** Controls  
Engineered Systems

Antriebstechnik • Drive Technology

Curtiss-Wright Antriebstechnik GmbH  
Badstrasse 5  
CH-8212 Neuhausen am Rhf./Switzerland  
Telefon: +41 (0)52 674 84 84  
Telefax: +41 (0)52 674 66 09  
email: info@cwat.ch  
Internet: www.cwat.ch